


**PLAN**

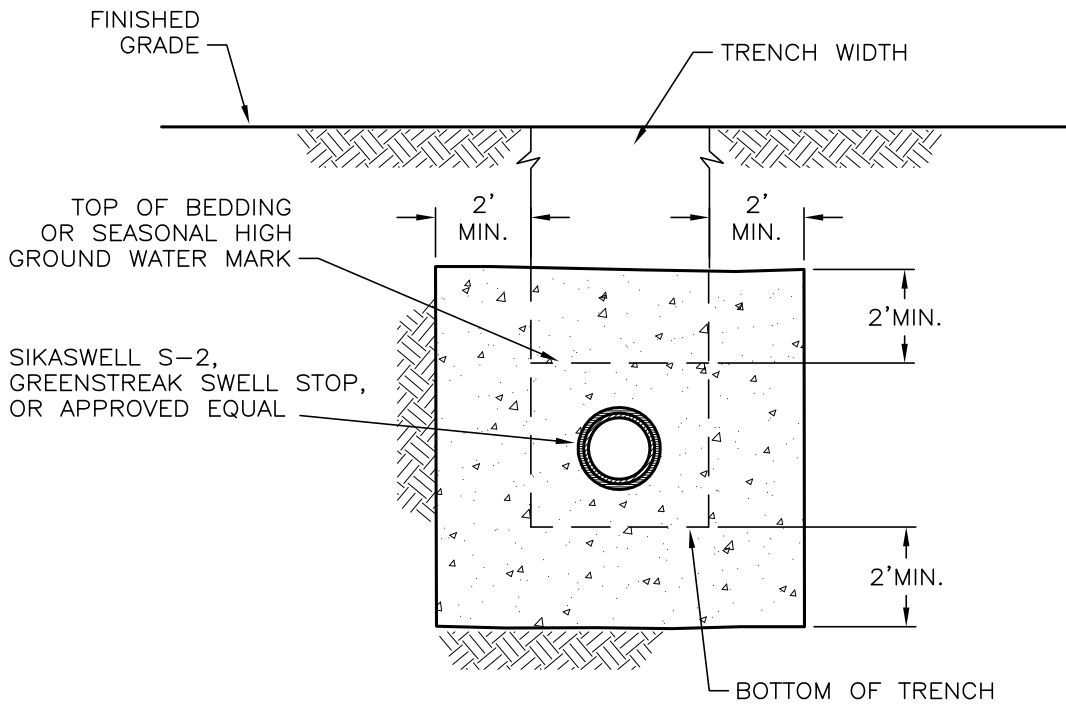

**SECTION**

**NOTES:**

1. WATER STOPS SHALL BE CONSTRUCTED AT 200-FOOT MAXIMUM SPACING IN GROUND WATER CONDITIONS AND WHERE WET TRENCH BEDDING IS USED, AS DIRECTED BY WATER UTILITY.
2. WRAP PIPE WITH SIKASWELL S-2, OR GREENSTREAK SWELL STOP, OR EQUIVALENT WHERE PIPE IS EXPOSED TO CONCRETE PRIOR TO POURING.
3. USE LIGHT CONCRETE, TYPE A SLURRY BACKFILL PER ORANGE BOOK 337.08.01-1. IF CEMENT BOARD IS USED FOR CONCRETE FORMS, IT MAY BE LEFT IN PLACE.

NO.	REVISION	DATE	STANDARD DETAIL FOR PUBLIC WORKS CONSTRUCTION	SECTION: <b>DOUGLAS COUNTY</b>
			<b>WATER STOP</b>	DATE: <b>JULY 2017</b>
				DWG: <b>B02</b>